



Duplexer Detail Technical

Item	Specification	
Frequency Range (MHz)	RX: 457.85 ~ 459.35	TX: 467.45 ~ 468.95
Insertion Loss (dB)	≤1.5	
Ripple (dB)	≤0.6	
VSWR	≤1.25	
Rejection RX、TX	≥85dB@464.35MHZ ≥95dB@467.45MHZ	≥85dB@462.45MHZ ≥95dB@459.35MHZ
Power W	80W	
Connecter type	N-K	
Temp °C	-30°C~+60°C	
Size	260*458*60mm(Not include cover blot 10mm)	

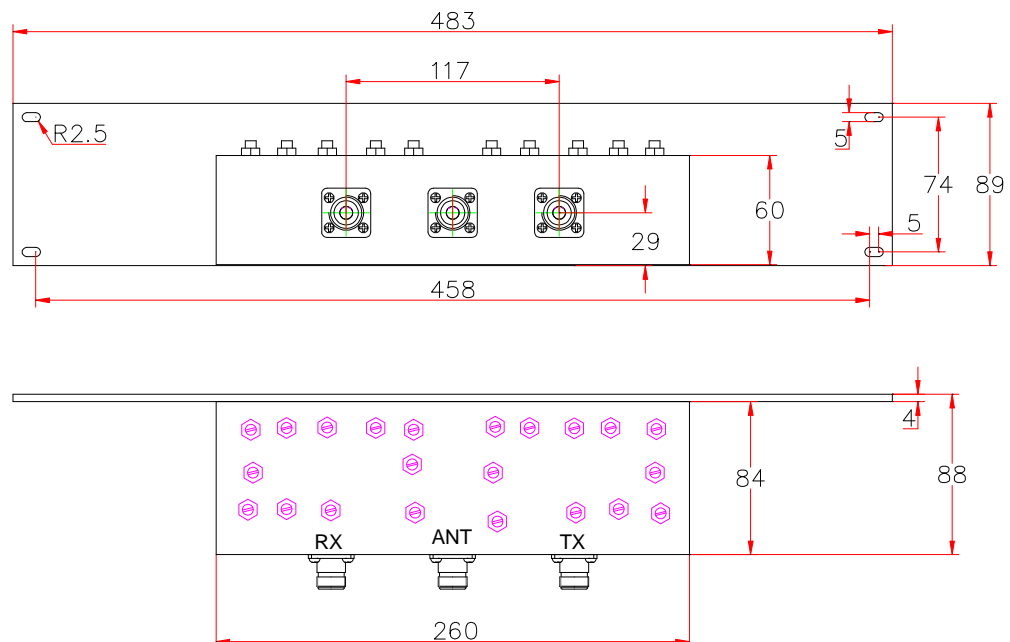

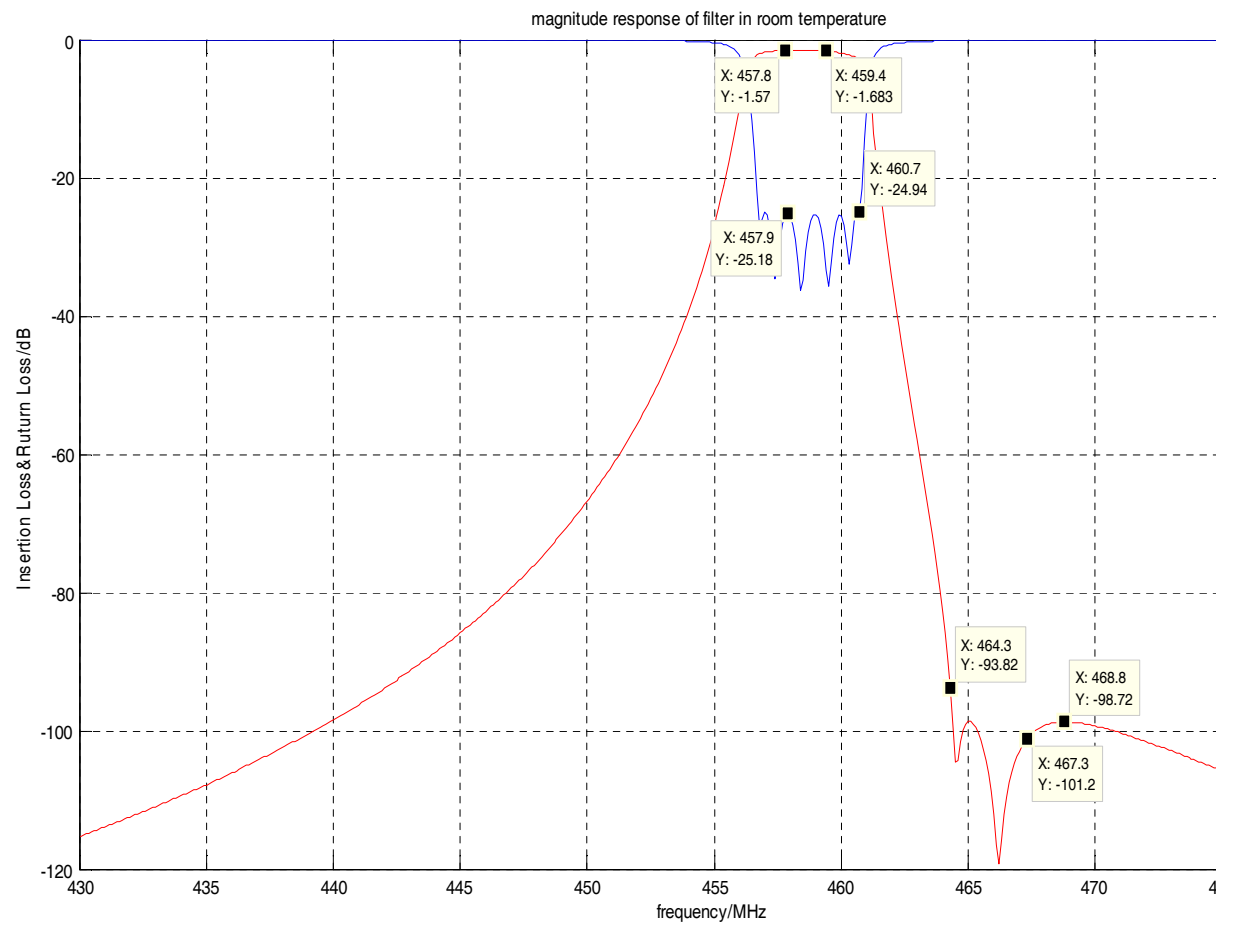

TX CURVE:

